


soft top jaws

WBB-D

for Berg-power chucks

INCH serration
1/16" x 90° or 3/32" x 90°

Material: 16MnCr5
serration ground

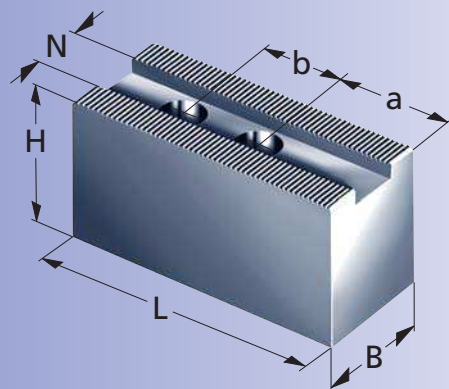

Type	Id.-No.	B	H	L	N	serration	a + b for DIN 912	kg/set	Berg
WBB-D 211	034241	20	40	55	8	1/16" x 90°	30 + 14 M9	0,75	KH 110-30
WBB-D 232*	081621	30	45	70	10	1/16" x 90°	38 + 19 M10	1,3	KH 140-36 KH 160-45
WBB-D 235	081622	30	55	84	12	1/16" x 90°	45 + 21 M12	3,3	KH 175-56 KH 200-68
WBB-D 237	081623	35	60	90	12	1/16" x 90°	55 + 21 M12	3,6	KH 175-56 KH 200-68
WBB-D 240	081624	40	60	110	16	1/16" x 90°	63 + 29 M16	4,8	KH 250-91 KH 315-117
WBB-D 228	081625	50	80	150	20	3/32" x 90°	81 + 38 M20	8,4	KH 400-165 KH 600-165 KH 500-165


*jaws tipped

soft top jaws

WBR-D

INCH serration
1/16" x 90° or 3/32" x 90°

Material: 16MnCr5
serration ground

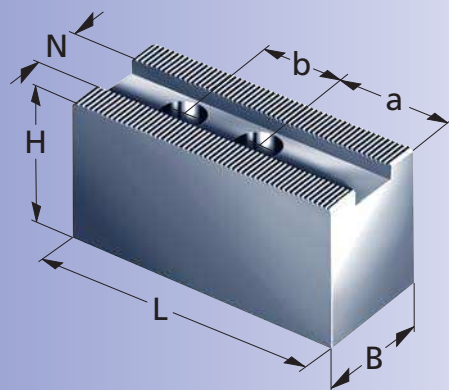


Type	Id.-No.	B	H	L	N	serration	a + b for DIN 912	kg/set	Röhm	Schunk
WBR-D 012	081630	30	55	55	12	1/16" x 90°	31 + 15 M8	1,8	KFD-HS 160/175 KFD 130 KFD-HE 170 KFH 140	HSG 160 ROTA NCD 165
WBR-D 017	081631	40	60	70	17	1/16" x 90°	39 + 19 M12	3,1	KFD-HS 200 KFD 200 KFD-HE 210	HSG 200
WBR-D 117	081632	40	60	90	17	1/16" x 90°	59 + 19 M12	4,2	KFD-HS 250 KFD 200 KFD-HE 210	HSG 250
WBR-D 021	081633	50	60	105	21	1/16" x 90°	65 + 25 M16	6,0	KFD-HS 315 KFD 250 KFD-HE 254/315	HSG 315 ROTA NCD 250/315
WBR-D 025	081634	60	80	140	25,5	3/32" x 90°	89 + 31 M20	14,5	KFD-HS 400/500 KFD 400-800 KFD-HE 400	ROTA NCD 400/500



Page 6



Page 24
Page 35
Page 143
Page 144



Page 55



Page 66