


soft top jaws alum.

WBJ-MA light version

METRIC serration
1,5 x 60°


Material: aluminium (tensile strength = 500 N/mm²)

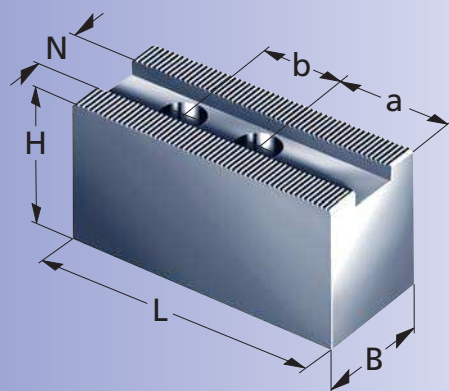

Type	Id.-No.	B	H	L	N	serration	a + b for DIN 912	kg/set	SMW-AUTOBLOK	Howa	Kitagawa	Schunk
WBJ-MA 120	036017	35	50	72	12	1,5 x 60°	25 + 20 M10	0,9	HFKN-M 165 AN/AL/BH/-M 165 BHM-FC 165 RC-M 165 AP/NT-M170 BB-M 175 HB/PB/PBI-M 165	HO7MA6 HO15M6 HO22M6 HO24M6 HO27M6 HO37M6 HO47M6	AS165 B-06/-106/-160/-206 BB-06/-206 BL-206 • B-07 HJA 5-6 • HOB-6 HO-6 HOH-06/-106/-160/-206 HOS 6 N-06/-160 • NL-06	HSL 165 ROTA NC/NCF plus185 ROTA NCD 165-185 ROTA NCK/ROTA NCK plus 165 ROTA NC/NCF 165
WBJ-MA 140	081728	40	60	90	14	1,5 x 60°	45 + 25 M12	1,5	HFKN-M 210 AN/AL/BH/BB-M 210 BHM-FC 210 RC-M 210 AP/APL/NT-M 215 HB/PB/PBI-M 210	HO7MA8 HO15M8 HO23M8	AS210 B-08/-108/-200/-208 BB-08/-208 BL-208 • HJA 6-8 HO 8 • HOB 8 HOH-8/-108/-200/-208 HOS 8 N-08/-200 • NL-08	HSL 210 ROTA NCD/NCK 210 ROTA NC/ROTA NCF 210 ROTA NCK plus 210 ROTA NC/NCF plus 215
WBJ-MA 165	081730	40	60	110	16	1,5 x 60°	55 + 30 M12	2,7	HFKN-M 260 AN/AL/BH/BB-M 250 BHM-FC 250 RC-M 250 AP/APL/NT-M 260 HB/PB/PBI-M 250		AS250 B-10/-110/-210/-210X/-250 BB-10/-210 BL-210 HJA 6-10/8-10 HO-10 • HOB-10 HOH-10/-110/-210/-250 HOS-10 N-10/-250 • NL-10	HSL 250 ROTA NC/NCD/NCF/NCK 250 ROTA NCK plus 250 ROTA NC/NCF plus 260
WBJ-MA 180	081731	50	80	130	18	1,5 x 60°	60 + 30 M14	3,3		HO7MA12 HO15M12 H23M12 HO22M10 HO24M10 HO27M10 HO37M10 HO47M10	B-12 B-300 N-12 N-300 HO-12 HOB/HOS/HOH-12 HOH 300 HJA6-12/8-12 HLA 6-12/5-18/8-15 N 12 N 300	HSL 315 ROTA NC/NCF 315
WBJ-MA 210	039511	50	80	130	21	1,5 x 60°	60 + 30 M16	3,8	HFKN-M 315 BHM-FC 315 AN/AL/BH/BB-M 315 RC-M 305 AP/APL/NT-M 315 HB/PB/PBI-M 315		B-212 BB-212 BL-212	HSL 315 ROTA NCD/NCK 315 ROTA NC/NCK/NCF plus 315



• Page 45
• Page 53
• Page 143
• Page 144



• Page 62



• Page 66