


soft pie jaws alum.

SBJ-MA light version

METRIC serration
1,5 x 60°

Material: aluminium (tensile strength = 500 N/mm²)

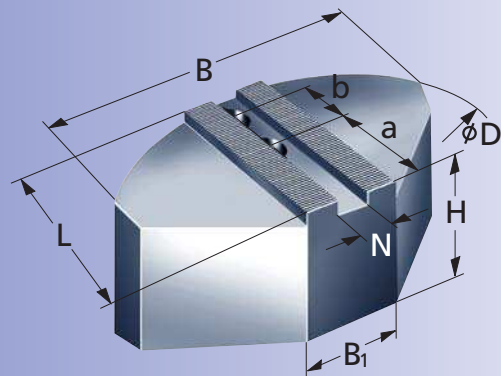


Type	Id.-No.	B	B ₁	H	L	D	N	serration	a + b for DIN 912	kg/set	SMW-AUTOBLOK	Howa	Kitagawa	Schunk
SBJ-MA 160	036018	120	50	58	60	160	12	1,5 x 60°	25 + 20 M10	1,9	HFKN-M 165 AN/AL/BH/-M 165 BHM-FC 165 RC-M 165 AP/NT-M 170 BB-M 175 HB/PB/PBI-M 165	HO7MA6 HO15M6 HO22M6 HO24M6 HO27M6 HO37M6 HO47M6	AS165 B-06/-106/-160/-206 BB-06/-206 BL-206 • B-07 HJA 5-6 HOB-6 • HO-6 HOH-06/-106/-160/-206 HOS 6 N-06/-160 • NL-06	HSL 165 ROTA NC 185 ROTA NCF plus 185 ROTA NCD 165-185 ROTA NCK ROTA NCK plus 165 ROTA NC/NCF 165
SBJ-MA 200	081732	140	50	58	75	200	14	1,5 x 60°	35 + 25 M12	3,0	HFKN-M 210 AN/AL/BH/BB-M 210 BHM-FC 210 RC-M 210 AP/APL/NT-M 215 HB/PB/PBI-M 210	HO7MA8 HO15MA8 HO23MA8	AS210 B-08/-108/-200/-208 BB-08/-208 BL-208 HJA 6-8 HO 8 • HOB 8 HOH-8/-108/-200/-208 HOS 8 N-08/-200 • NL-08	HSL 210 ROTA NCD/NCK 210 ROTA NC 210 ROTA NCF 210 ROTA NCK plus 210 ROTA NC 215 ROTA NCF plus 215
SBJ-MA 250	081734	180	70	58	90	250	16	1,5 x 60°	40 + 30 M12	4,5	HFKN-M 260 AN/AL/BH/BB-M 250 BHM-FC 250 RC-M 250 AP/APL/NT-M 260 HB/PB/PBI-M 250		AS250 B-10/-110/-210/-210X/-250 BB-10/-210 BL-210 HJA 6-10/8-10 HO-10 • HOB-10 HOH-10/-110/-210/-250 HOS-10 N-10/-250 • NL-10	HSL 250 ROTA NC/NCD 250 ROTA NCF/NCK 250 ROTA NCK plus 250 ROTA NC 260 ROTA NCF plus 260
SBJ-MA 315	236520	240	80	78	117	320	21	1,5 x 60°	45 + 30 M16	4,5	HFKN-M 315 BHM-FC 315 AN/AL/BH/BB-M 315 RC-M 305 AP/APL/NT-M 315 HB/PB/PBI-M 315		B-212 BB-212 BL-212	HSL 315 ROTA NCD/NCK 315 ROTA NC/NCK plus 315 ROTA NCF plus 315

soft top jaws
METRIC serration



Page 45
Page 53
Page 143
Page 144



Page 62



Page 66