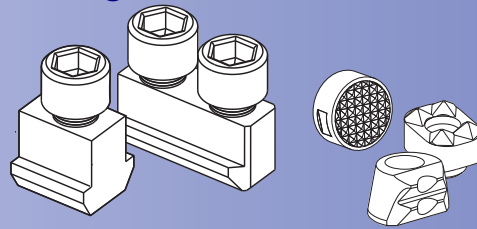














T-nuts grippers



SMW-AUTOBLOK Berg Forkardt Howa Kitagawa Röhmsch Schunk

<p>NST T-nuts for chucks</p> <p>INCH serration 1/16" x 90° or 3/32" x 90°</p>	<p>NST</p>  <p>Page 56</p>	
<p>NSTE double T-nuts for chucks</p> <p>INCH serration 1/16" x 90° or 3/32" x 90°</p>	<p>NSTE</p>  <p>Page 60</p>	
<p>NSTE-M double T-nuts for chucks</p> <p>METRIC serration 1,5 x 60°</p>	<p>NSTE-M</p>  <p>Page 62</p>	
<p>TS T-nut bolts</p> <p>TM slotted nuts</p> <p>only for Berg-chucks type KH</p>	<p>TS, TM</p>  <p>Page 64</p>	
<p>NSO special T-nuts to customer request</p>	<p>NSO</p>  <p>Page 65</p>	
<p>UGE 10 jaw blanks</p> <p>UGE 20 jaw blanks</p> <p>UGE 21 jaw blanks with one row of teeth</p> <p>hardened steel</p> <p>hardened steel</p> <p>hardened steel</p>	<p>UGE 10</p>  <p>Page 66</p>	<p>UGE 20/21</p>  <p>Page 66</p>
<p>UGE 30 jaw blanks</p> <p>MGH clamping points</p> <p>solid carbide</p> <p>HSS</p>	<p>UGE 30</p>  <p>Page 67</p>	<p>MGH</p>  <p>Page 67</p>
<p>HDS-R jaw blanks</p> <p>HDS-Q jaw blanks</p> <p>round/solid carbide</p> <p>square/solid carbide</p>	<p>HDS-R</p>  <p>Page 68</p>	<p>HDS-Q</p>  <p>Page 68</p>
<p>precision gripper inserts</p> <p>G14</p> <p>G25</p> <p>G15</p> <p>G30</p> <p>HSS</p> <p>light duty pull down</p> <p>heavy duty pull down</p> <p>light duty pull down</p> <p>heavy duty pull down</p>	<p>G</p>  <p>Page 69</p>	



safety advise:

Top jaws are safety components, which can enter high load depending on their use.

Max grip forces and speeds must not be exceeded at any time.

For safety reasons all jaws as well as all T-nuts and bolts must be checked regularly.

for damage and cracks.