


# Прецизионный механизированный патрон Ø 165 - 400 мм

- закрытый центр - БЫСТРАЯ СМЕНА КУЛАЧКОВ
- 2 и 3 кулачка

# AN-RM

палетного типа  
БЫСТРАЯ СМЕНА КУЛАЧКОВ

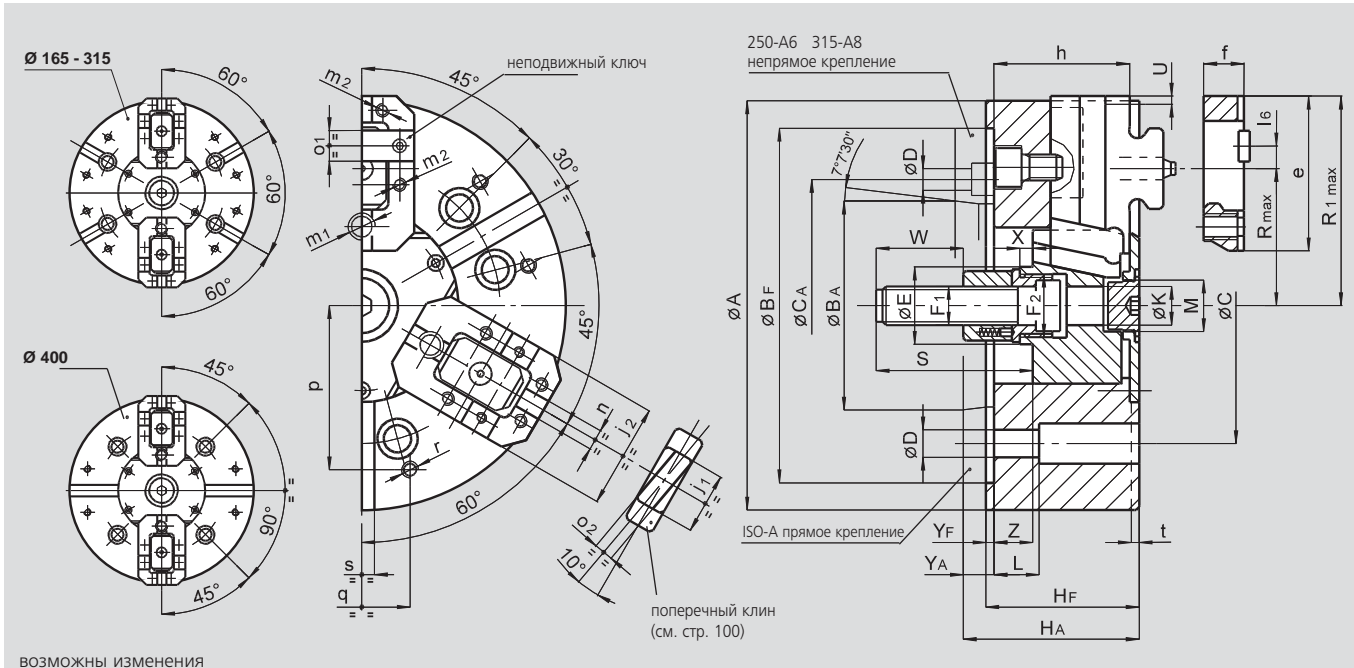

ВОЗМОЖНЫ ИЗМЕНЕНИЯ

3

SMW-AUTOBLOK тип		AN-RM 165		AN-RM 210		AN-RM 250			AN-RM 315		AN-RM 400	
тип крепления		Z140	A5	Z170	A6	Z220	A6	A8	Z220	A8	Z300	A11
A	mm	165		210		254			315		390	
B/ BA	H6 mm	140	82.563	170	106.375	220	106.375	139.719	220	139.719	300	196.869
C	mm	104.8		133.4		171.4		171.4	171.4		235	
CA	mm	-	-	-	-	-	133.4	-	-	-	-	-
D	mm	11.5		13.5		13.5		17	17		21	
E	mm	32		41		47			47		86	
F1	mm	M16		M20		M24			M24		M24	
F2	mm	M24 x 2		M32 x 1.5		M38 x 1.5			M38 x 1.5		M75 x 2	
H/ HA	mm	71	81	85	97	95	114	109	105	119	116	131
K	mm	17		20		25			25		65	
L	mm	23		32		28			38		54	
M	mm	M24 x 1.5		M32 x 1.5		M32 x 1.5			M38 x 1.5		M68 x 2	
патрон открыт	R1 mm	86		107		130			160		196	
max.	R mm	56		70		85			105		130	
S	mm	104		97		103			103		105	
ход кулачка	U mm	3.6		4.4		5			6.3		7	
W	mm	52		55		60			60		60	
X	mm	17		8		8			8		8	
Y/ YA	mm	5	15	5	17	5	24	19	5	19	6	21
max./min.	Z mm	17/0		21/0		24/0			30/0		33/0	
e	mm	63		79		96			116		138	
f	mm	19		22		25			25		28	
h	mm	61		74		84			94		104	
j1	mm	24		32		38			38		46	
j2	mm	44		52		65			65		75	
l6	mm	10		11		14			14		14	
m1	mm	M10		M12		M16			M16		M20	
m2	mm	M5		M6		M8			M8		M10	
n H7	mm	7.94		7.94		12.7			12.7		12.7	
o1 h7	mm	12.68		12.68		19.03			19.03		19.03	
o2 h7	mm	9		9		12			12		12	
p	mm	65		80		102			120		150	
q	mm	36		45		60			60		80	
r	mm	M8		M8		M10			M10		M12	
s H12	mm	16		16		16			16		20	
t	mm	5		5		5			5		5	