



nual chuck HI-GRIP®

Direct mounting



Recess and bolt circle to DIN 55026 / ISO-A 702/1


■ No re boring of already machined jaws necessary, because of runout < 0.02 (e.g. HG-F 210)



Wedge bar design guarantees highest precision, concentricity and repeatability as well as highest gripping forces

• Safety jaw release with interlock

• Jaw system "F" (compatible with Forkardt jaws)

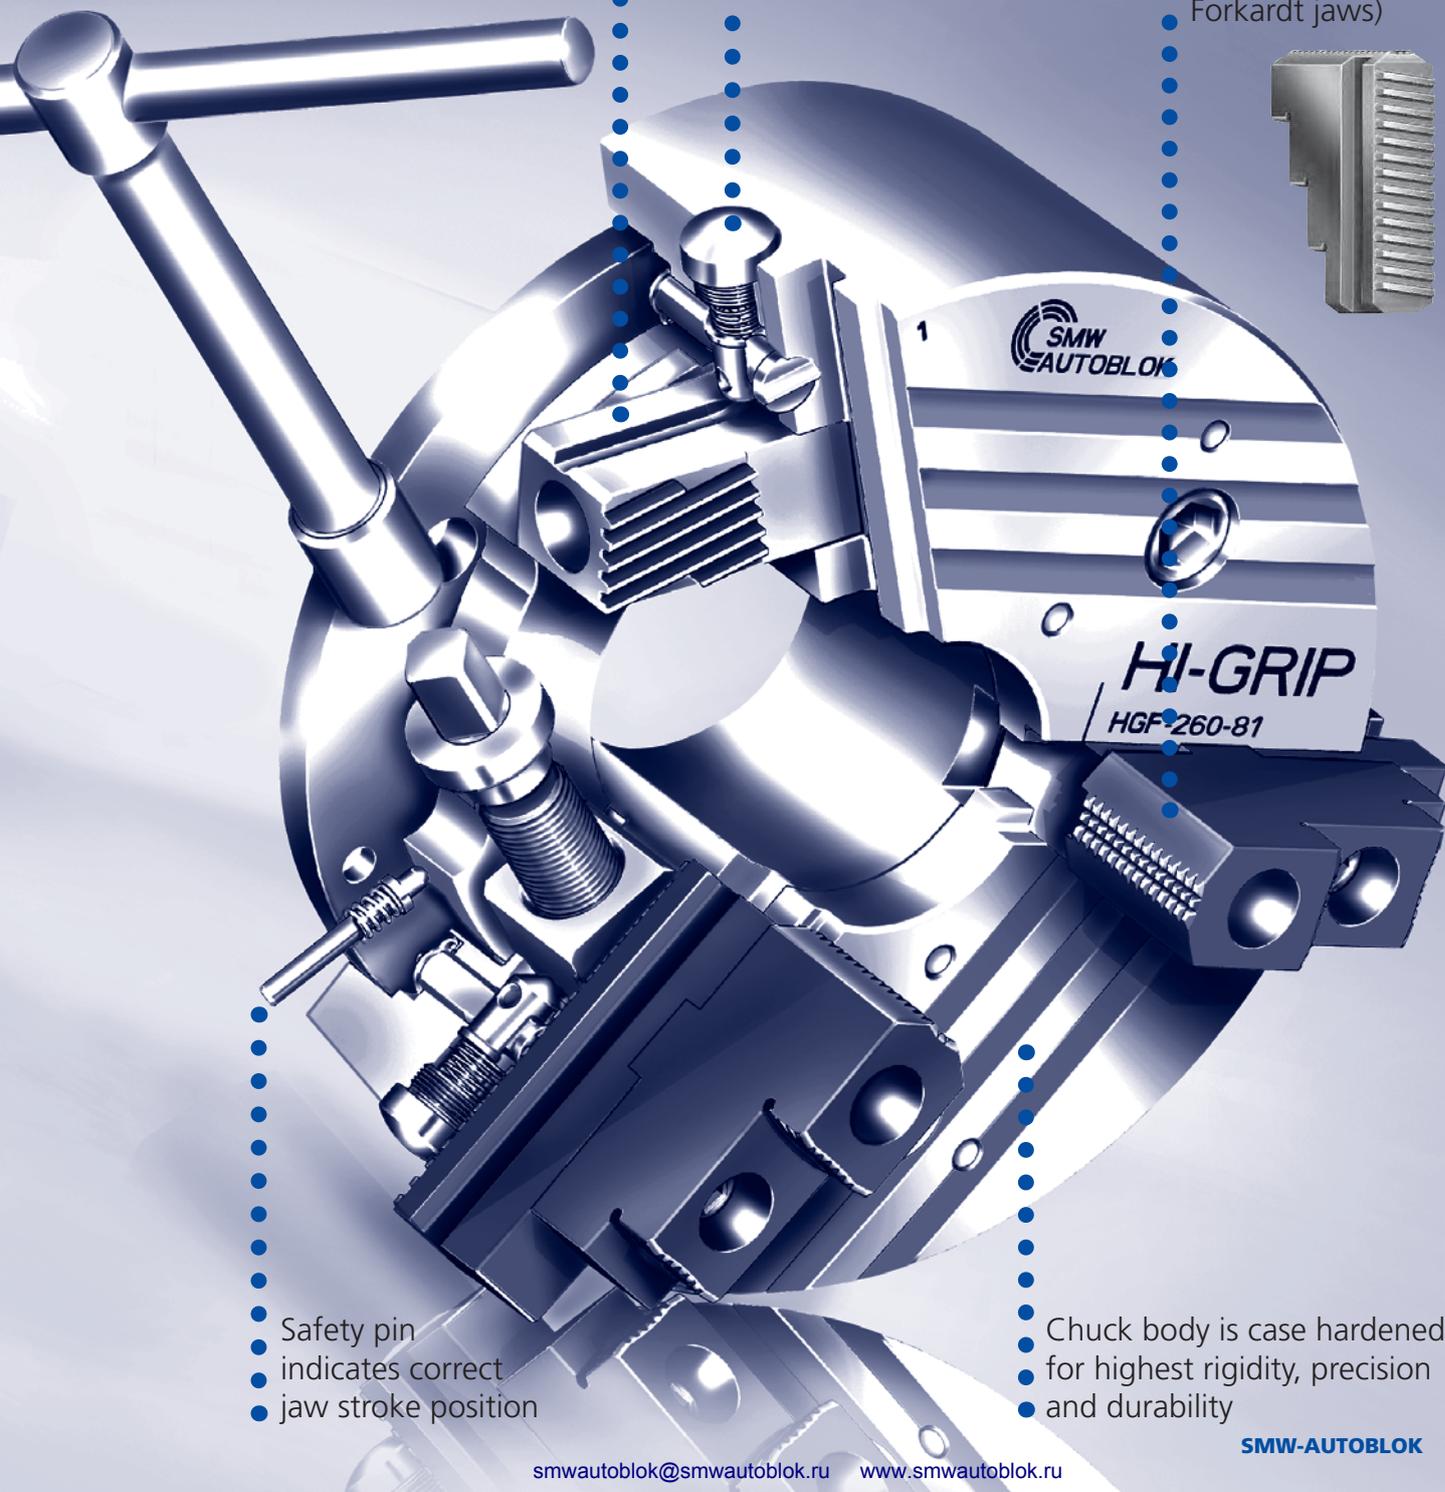

• Safety pin indicates correct jaw stroke position

• Chuck body is case hardened for highest rigidity, precision and durability