


double T-nuts

NSTE

quenched and ground

incl. screw
DIN 912 – 12.9

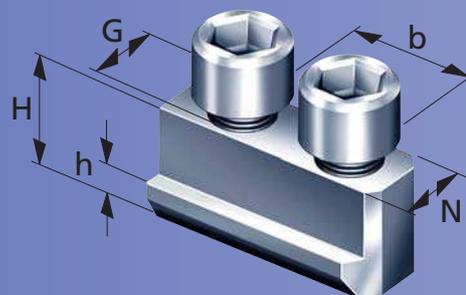

version 2

Type	Id.-No.	vers.	N	H	h	b	G	screw DIN 912	torque Md max. (Nm)	SMW-AUTOBLOK
NSTE 08	038265	2	8	13,5	5	12	M6	M6 x 20	16	HFKN-D 110
NSTE 12	12061300	2	12	15	6,5	16	M8	M8 x 20	30	BH-D 130 PB-D 130 HB-D 130 BB-D 140
NSTE 12-1	12061200	1	12	15	6,5	16	M8	M8 x 20	30	AN-D 125 AL-D 125
NSTE 14	73061650	1	14	18,5	6,5	16,5	M10	M10 x 20	50	HFKN-D 165 • AN/AL/BH/BH-D 165 BHD-FC 165 • PB/PBI/RC-D 165 AP/NT-D 170 • BB-D 175 HYND-S 180
NSTE 17	081813	2	17	23	9	22	M12	M12 x 30	70	
NSTE 17-1	081814	2	17	21,5	9	19	M12	M12 x 30		
NSTE 17-2	73062150	1	17	20,5	7,5	23	M12	M12 x 25	70	HFKN-D 210 • AN-D 210 • AL-D 210 BH-D 210 • BHD-FC 210 • RC-D 210 BB-D 210 • PB-D 210 • PBI-D 210 • HB-D 210 HYND-S 210/226 • AP-D 215 • NT-D 215
NSTE 17-3	18062632	1	17	20,5	7,5	30	M12	M12 x 25	70	AP/NT-D260
NSTE 21	081815	2	21	27	11	28	M16	M16 x 35	150	
NSTE 21-2	73063050	1	21	26,5	10	30	M16	M16 x 30	150	HFKN-D 260/315 • HFKN-M 315 AN/AL/BH/BB/HB/PB/PBI-D 250/315 AN/AL/BH/BB/PB/PBI-M 315
NSTE 21-3	034148	1	21	26,5	10	28	M16	M16 x 30	150	AP/APL/NT-D 315 • AP/APL/NT-M 315 HYND-S 250/315 • RC-D 250/305 RC-M 305 • BHD-FC 250/315 • BHM-FC 315
NSTE 25,5	081817	2	25,5	29	11	35	M20	M20 x 40	300	HFKN-D 400 HFKN-M 400
NSTE 25,5-1	73065030	1	25,5	33	14,5	38	M20	M20 x 40	300	RC-D 500 AP-D 400 • APL-D 400 NT-D 400